

**PRELIMINARY WIND RESOURCE ASSESSMENT OF
LAVINIA PROJECT**

Client	Department of Innovation, Energy and Mines
Contact	Rick Halas
Document No	800217-CAMO-T-02
Issue	A
Status	Draft
Classification	Client's Discretion
Date	27 July 2012

Prepared by: Y. Boucetta, D. Simjanovski

Verified by: É. Desrosiers

Approved by: T. Geer

IMPORTANT NOTICE AND DISCLAIMER

1. Acceptance of this document by the Client is on the basis that GL Garrad Hassan Canada, Inc. (hereafter “GL GH”), a GL Group member operating under the GL Garrad Hassan brand, is not in any way to be held responsible for the application or use made of the findings and the results of the analysis herein and that such responsibility remains with the Client.

This Report shall be for the sole use of the Client for whom the Report is prepared. The document is subject to the terms of the Agreement between the Client and GL GH and should not be relied upon by third parties for any use whatsoever without the express written consent of GL GH. The Report may only be reproduced and circulated in accordance with the Document Classification and associated conditions stipulated in the Agreement, and may not be disclosed in any offering memorandum without the express written consent of GL GH.

GL GH does not provide legal, regulatory, tax and/or accounting advice. The Client must make its own arrangements for advice in these areas.

This document has been produced from information as of the date hereof and, where applicable, from information relating to dates and periods referred to in this document. The Report is subject to change without notice and for any reason including, but not limited to, changes in information, conclusion and directions from the Client.

2. This Report has been produced from information relating to dates and periods referred to herein. Any information contained in this Report is subject to change.

KEY TO DOCUMENT CLASSIFICATION

Strictly Confidential	For disclosure only to named individuals within the Client’s organization
Private and Confidential	For disclosure only to individuals directly concerned with the subject matter of the Report within the Client’s organization
Commercial in Confidence	Not to be disclosed outside the Client’s organization
GL GH only	Not to be disclosed to non-GL GH staff
Client’s Discretion	Distribution for information only at the discretion of the Client (subject to the above Important Notice and Disclaimer)
Published	Available for information only to the general public (subject to the above Important Notice and Disclaimer)

REVISION HISTORY

Issue	Issue Date	Summary
A	13 April 2012	Final (electronic version)
B	27 July 2012	Updated based on Client's comments

Circulation	Copy No.
IEM	1
GL GH	2

TABLE OF CONTENTS

1	INTRODUCTION	2
2	MONITORING TOWER INSTRUMENTATION AND WIND DATA ANALYSIS	3
	2.1 Lavinia	3
	2.2 Long-term Mean Wind Speeds	3
3	CONCLUSIONS AND RECOMMENDATIONS	5
4	WIND ROSE	6

1 INTRODUCTION

The Department of Innovation, Energy and Mines of Manitoba (Hereafter “**IEM**” or “**Client**”) has requested that GL Garrad Hassan Canada, Inc. (“**GL GH**”), formerly Helimax Energy, Inc., conduct an independent preliminary assessment of the wind speed at the Lavinia site. The results of this work are reported here.

The Lavinia Project is located in southwestern Manitoba, approximately 3 km southeast of Lavinia town and 150 km west of the Lake Manitoba. The current Lavinia Project measurement campaign consists of one 60 m NRG XHD meteorological mast.

The site terrain is simple and mostly flat with only minor variation in elevation across the site. Elevation ranges between 480 m and 550 m. Based on satellite imagery (Google Earth), the ground cover on the site is a mix of deciduous trees creating windbreaks between open fields containing agricultural crops and the small lakes.

The table below indicates the location of the monitoring met tower.

Site	Latitude [°]	Longitude [°]
Lavinia	50.2517 N	100.6449 W

This document provides a summary of the analysis of the wind regime for the meteorological mast. IEM has supplied to GL GH approximately 1.3 years of data recorded at the Lavinia site from one meteorological mast, Mast 9020. Information concerning the configuration, instrument mounting arrangements, and sensor calibrations of the site mast have been assumed from the documentation and the information provided by the Client. Furthermore, it has not been possible for GL GH to independently verify this information, as it was not in the scope of the present mandate to visit the proposed site. GL GH strongly recommends that an inspection of the site and installed mast be completed in order to verify the mast configuration and site land cover assumptions when a comprehensive independent assessment of the wind regime of the proposed wind farm is performed.

2 MONITORING TOWER INSTRUMENTATION AND WIND DATA ANALYSIS

2.1 Lavinia

The measurement campaign consists of one tubular-type meteorological mast, 60 m in height. The Mast 9020 was installed in October 2009 and the data have been provided for the period from October 2009 to February 2011.

Information about the meteorological mast and data has been provided by IEM. Mast 9020 has been reportedly equipped with NRG Systems sensors: #40C anemometers, 200P wind vanes, 110S thermometer and LI-COR pyranometer. A NRG Symphonie data logger has been programmed to record 10-minute mean, standard deviation, maximum and minimum of wind speed, direction, temperature, and solar radiation flux.

Mast 9020 is reportedly equipped with the following instrumentation:

Instrument	Serial Number	Height [m]	Boom Orientation (true North)
NRG #40C anemometer	121328	60.0	225
NRG #40C anemometer	121335	60.0	0
NRG #40C anemometer	121326	40.0	225
NRG #40C anemometer	121333	40.0	0
NRG #40C anemometer	121336	10.0	225
NRG #40C anemometer	121334	10.0	45
NRG 200P wind vane	-	60.0	270
NRG 200P wind vane	-	10.0	270
NRG 110S Thermometer	-	2.0	-
LI-COR pyranometer	PY64556	2.0	-

The wind data have been subject to a quality checking procedure by GL GH to identify records which were affected by equipment malfunction and other anomalies. Characteristic of this region, the instruments on the mast experienced some periods of icing, resulting in erroneous or inconsistent data during the winter months.

The following table summarizes the data recovery at the Mast 9020 at 60 m measurement height.

Mast	Measurement Height [m]	Available Data [years]	Data Recovery Rate [%]
9020	60.0	1.3	94

2.2 Long-term Mean Wind Speeds

Data have been recorded on the Lavinia site at one met mast with sensor heights up to 60.0 m. Data are available at the mast for the period from October 2009 to February 2011. The calculation of the long-term wind regime at the site was performed as described below:

- The annual wind speed at the Brandon, Dauphin, Wasagaming, Melita and Shoal Lake EC stations and MERRA points was established from the measured data for the period from January 1995 to March 2012.

- Data recorded at the Brandon, Dauphin, Wasagaming, Melita and Shoal Lake EC stations, as well as the MERRA point data were correlated to the measured data recorded at Mast 9020. The results of these correlations were observed to have coefficients of determination (R^2) values between 0.55 and 0.86.
- In order to extend the period of measurement at the Lavinia site, daily correlation was conducted from the Shoal Lake meteorological reference station, which is operated by Environment Canada. The correlation (R^2) between this reference station and the meteorological mast of Lavinia is 0.86, which is considered good. Consequently, GL GH considered an upward adjustment of 2.9% to the site data appropriate in order to extend the period of data measured on site to the longer period measured at the reference station. Following this adjustment, the long-term mean wind speed at the Lavinia mast was estimated to be 6.9 m/s at 60 m. It is noted that uncertainty is present in this prediction due to the amount of data available to correlate between the reference station and the site.
- The annual wind speed and direction frequency distribution at Mast 9020 were established from the measured data for the period from October 2009 to February 2011, and subsequently adjusted to reflect the predicted long-term mean wind speed.
- The boundary-layer power law shear exponents were derived at Mast 9020. The concurrent wind speed data recorded at the measurement heights were used to derive the expected long-term mean power law shear exponent at the mast locations. The results were used to extrapolate the long-term wind regimes to the proposed hub height of 80 m. The following table presents the predicted long-term mean wind speed at Mast 9020. No displacement height was deemed necessary for the site considering the fact that the mast is mostly surrounded by agricultural crops.

Mast	Measurement Height [m]	Long-term Wind Speed at Measurement Height [m/s]	Power-law Shear Exponent [α]	Long-term Wind Speed at 80 m [m/s]
9020	60.0	6.9	0.21	7.3

It is noted the measurement heights on Mast 9020 have not been verified by GL GH and therefore such there is additional uncertainty associated with the shear analysis.

The hub height wind speed frequency distribution at Mast 9020 has been derived by extrapolating the measured wind speed data on a time series basis. The extrapolated wind speed data were combined with directional data recorded at the highest measurement level available to create 80 m wind speed and direction frequency distributions. The calculated 80 m frequency distribution was scaled to reflect the long-term hub height mean wind speed prediction at the same height and is shown in the form of a wind rose in Figure 1.

3 CONCLUSIONS AND RECOMMENDATIONS

Recorded wind data have been analyzed at the Lavinia site. Based on the results from the analysis of this data, the following conclusions have been made concerning the site wind regime:

- The following table presents the long-term mean wind speed at mast location at the highest anemometer measurement height and at a proposed typical hub height of 80 m.

Mast	Measurement Height [m]	Mean Wind Speed at Highest Measurement Height [m/s]	Power-law Shear Exponent [alpha]	Mean Wind Speed at 80 m Hub Height [m/s]
9020	60.0	6.9	0.21	7.3

- Considering that data for only a short period was available at the met mast, additional data would provide a better understanding of the site wind regime. It is recommended that a more detailed assessment be completed once additional data become available.
- All information concerning the configuration, instrument mounting arrangements, and sensor calibrations of the mast site has been taken from the documentation provided by IEM. It has not been possible for GL GH to independently verify this information. GL GH strongly recommends that an inspection of the site and installed mast be completed in order to verify the mast configuration and site land cover assumptions when a full independent assessment of the wind regime of the proposed wind farm is performed.

4 WIND ROSE

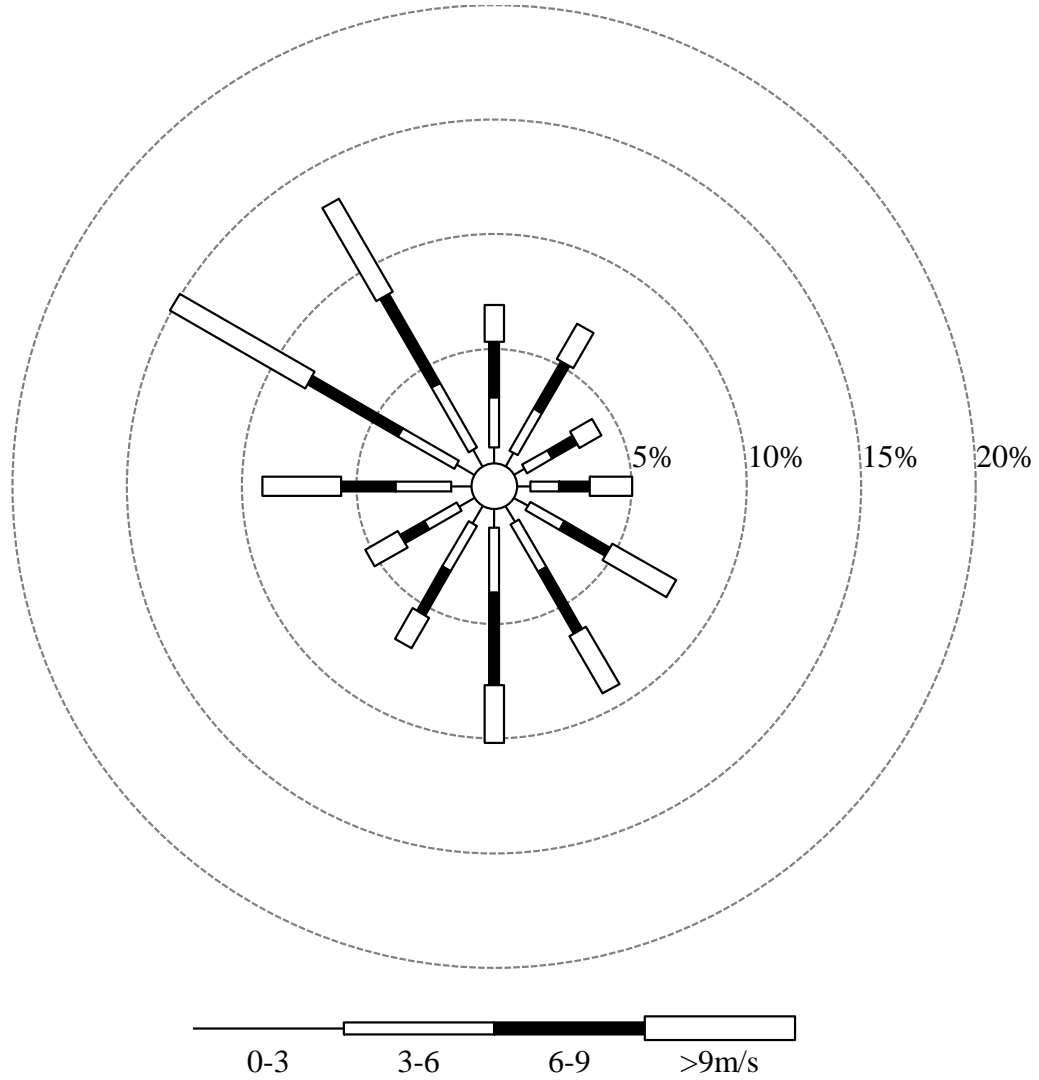


Figure 1 Predicted long-term annual wind rose at Mast 9020 at 80 m