

Environment Act Licence

Manitoba
Environment



Licence No. 1929

Issue Date September 29, 1994

In accordance with the Manitoba Environment Act (C.C.S.M. c. E125)

THIS LICENCE IS ISSUED TO:

DEPARTMENT OF NATURAL RESOURCES: "the Licencee"

for the expansion and operation of the Development being a wastewater treatment lagoon located on Section 2, Township 33, Range 25 WPM and with discharge of treated effluent into a bog area which drains into the Strank Lake and subject to the following specifications, limits, terms and conditions:

DEFINITIONS

In this Licence,

"as constructed drawings" means engineering drawings complete with all dimensions which indicate all features of the Development as it has actually been built;

"appurtenances" means machinery, appliances, or auxiliary structures attached to a main structure to enable it to function, but not considered an integral part of it;

"bentonite" means specially formulated standard mill grade sodium bentonite conforming to American Petroleum Institute Specification 13-A;

"cut-off" means a vertical-side trench filled with compacted clay or a wall constructed from compacted clay;

"Director" means an employee so designated pursuant to the Environment Act;

"effluent" means treated wastewater flowing or pumped out of the wastewater treatment lagoon or sewage treatment plant;

"fecal coliform" means aerobic and facultative, Gram-negative, nonspore-forming, rod-shaped bacteria capable of growth at 44.5 °C, and associated with fecal matter of warm-blooded animals;

"five-day biochemical oxygen demand" means that part of the oxygen demand usually associated with biochemical oxidation of organic matter within five days at a temperature of 20°C;

"flooding" means the flowing of water onto lands, other than waterways, due to the overtopping of a waterway or waterways;

“high water mark” means the line on the interior surface of the primary and secondary cells which is normally reached when the cell is at the maximum allowable liquid level;

“hydraulic conductivity” means the quantity of water that will flow through a unit cross-sectional area of a porous material per unit of time under a hydraulic gradient of 1.0;

“in-situ” means on the site;

“influent” means water, wastewater, or other liquid flowing into a wastewater treatment facility;

“low water mark” means the line on the interior surface of the primary and secondary cells which is normally reached when the cell is discharged;

“MPN Index” means the most probable number of coliform organisms in a given volume of wastewater which, in accordance with statistical theory, would yield the observed test result with the greatest frequency;

“primary cell” means the first in a series of cells of the wastewater treatment lagoon system and which is the cell that receives the untreated wastewater;

“riprap” means small, broken stones or boulders placed compactly or irregularly on dykes or similar embankments for protection of earth surfaces against wave action or current;

“secondary cell” means a cell of the wastewater treatment lagoon system which is the cell that receives partially treated wastewater from the primary cell;

“septage” means the sludge produced in individual on-site wastewater disposal systems such as septic tanks;

“sewage” means household and commercial wastewater that contains human waste;

“total coliform” means a group of aerobic and facultative anaerobic, Gram-negative, nonspore-forming, rod-shaped bacteria, that ferment lactose with gas and acid formation within 48 hours at 35 °C, and inhabit predominantly the intestines of man or animals, but are occasionally found elsewhere and include the sub-group of fecal coliform bacteria;

“wastewater treatment lagoon” means the component of this development which consists of an impoundment into which wastewater is discharged for storage and treatment by natural oxidation.

GENERAL REQUIREMENTS

1. The Licencee shall direct all sewage generated within the Wellman Lake recreational area toward the wastewater treatment lagoon or other approved sewage treatment facilities.

2. The Licencee shall operate and maintain the wastewater treatment lagoon in such a manner that:
 - (a) the release of offensive odours is minimized;
 - (b) the organic loading on the primary cell, as indicated by the five-day biochemical oxygen demand, is not in excess of 56 kilograms per hectare per day; and
 - (c) the depth of liquid in the primary cell or secondary cells does not exceed 1.5 metres.
3. The Licencee shall, in case of physical or mechanical breakdown of the wastewater collection and/or treatment system:
 - (a) notify the Director immediately;
 - (b) identify the repairs required to the wastewater collection and/or treatment system;
 - (c) undertake all repairs to minimize unauthorized discharges of wastewater; and
 - (d) complete the repairs in accordance with any written instructions of the Director.
4. The Licencee shall ensure that septage is not discharged into the wastewater treatment lagoon between the 15th day of October of any year and the 1st day of June of the following year.
5. The Licencee shall install and maintain a fence around the wastewater treatment lagoon to control access.

CONSTRUCTION SPECIFICATIONS

6. The Licencee shall, prior to the construction of the dykes for the expansion to the wastewater treatment lagoon:
 - (a) remove all organic topsoil from the area where the dykes will be constructed; or
 - (b) remove all organic material for a depth of 0.3 metres and a width of 3.0 metres from the area where the cut-off will be constructed.
7. The Licencee shall construct and maintain the wastewater treatment lagoon with a continuous liner under all interior surfaces of the cells in accordance with the following specifications:
 - (a) the liner shall be made of clay;
 - (b) the liner shall be at least one metre in thickness;

- (c) the liner shall have a hydraulic conductivity of 1×10^{-7} centimetres per second or less; and
 - (d) the liner shall be constructed to an elevation of 2.5 metres above the floor elevation of both the primary and the secondary cells;
8. The Licencee shall ensure that if, in the opinion of the Director, significant erosion of the interior surfaces of the dykes occurs, rip rap shall be placed on the interior dyke surfaces from 0.6 metres above the high water mark to 0.6 metres below the low water mark to protect the dykes from wave action.
9. The Licencee shall construct and maintain an all-weather access road to the wastewater treatment lagoon.

DISCHARGE LIMITS, TERMS AND CONDITIONS

10. The Licencee shall not discharge effluent from the wastewater treatment lagoon:
- (a) where the organic content of the effluent, as indicated by the five day biochemical oxygen demand, is in excess of 30 milligrams per litre;
 - (b) where the fecal coliform content of the effluent, as indicated by the MPN index, is in excess of 200 per 100 millilitres of sample;
 - (c) where the total coliform content of the effluent, as indicated by the MPN index, is in excess of 1500 per 100 millilitres of sample; or
 - (d) between the 1st day of November of any year and the 15 th day of June of the following year.

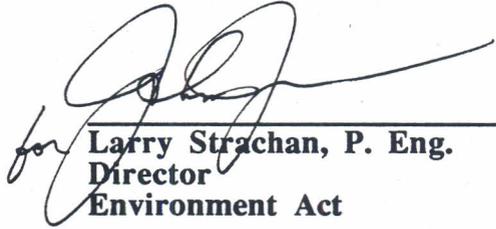
MONITORING AND REPORTING SPECIFICATIONS

11. The Licencee shall arrange with the designated Environment Officer a mutually acceptable time and date for any required soil sampling between the 15th day of May and the 15th day of October of any year.
12. The Licencee shall provide a drill rig which is acceptable to the designated Environment Officer to extract soil samples from the liner.
13. The Licencee shall ensure that all drill holes are sealed with bentonite pellets after the field drilling and sampling have been completed.
14. The Licencee shall subject undisturbed soil samples from the liner for the wastewater treatment lagoon, to hydraulic conductivity tests, with the number and location of samples to be specified by the designated Environment Officer up to a maximum of 10 samples.

15. The Licencee shall, not less than 2 weeks before the wastewater treatment lagoon is placed in operation, submit to the Director the results of the tests carried out pursuant to Clause 14.
16. The Licencee shall, on or before the 1st day of September, 1995, provide to the Director as constructed drawings of the wastewater treatment lagoon and all appurtenances.
17. The Licencee shall conduct a monitoring program along the effluent discharge route and the monitoring program shall include:
 - (a) a ten year monitoring period during which effluent is discharged from the wastewater treatment lagoon;
 - (b) a sample taken from the point of discharge from the wastewater treatment lagoon during all effluent discharge occurrences,
 - (c) a sample collected, at the each of the following locations in the months of May and July and during all effluent discharge occurrences:
 - (i) along the drain from Strank Lake to Line Lake,
 - (ii) at a selected location in the middle of Line Lake which is acceptable to the Director; and
 - (d) the sample analysis and calculations for the following parameters:
 - (i) temperature,
 - (ii) pH,
 - (iii) total kjeldahl nitrogen, nitrate, ammonia and the calculated value of un-ionized ammonia,
 - (iv) dissolved oxygen, and
 - (v) total phosphorus.
18. The Licencee shall, not less than 30 days after the results of the sample analysis are available, submit to the Director the results of the monitoring program carried out pursuant to Clause 17.
19. This Licence replaces Licence No. 1400 which is hereby rescinded.

REVOCATION

If in the opinion of the Director the Licencee has exceeded or is exceeding or has or is failing to meet the specifications, limits, terms, or conditions set out herein, the Director may revoke, temporarily or permanently, this Licence.


for **Larry Strachan, P. Eng.**
Director
Environment Act

File No.: 3195.10